


# NON-INSULATED – ANCHORED SYSTEM, BITUMEN SHEET WATERPROOFING UNDERLAYER BOARDING

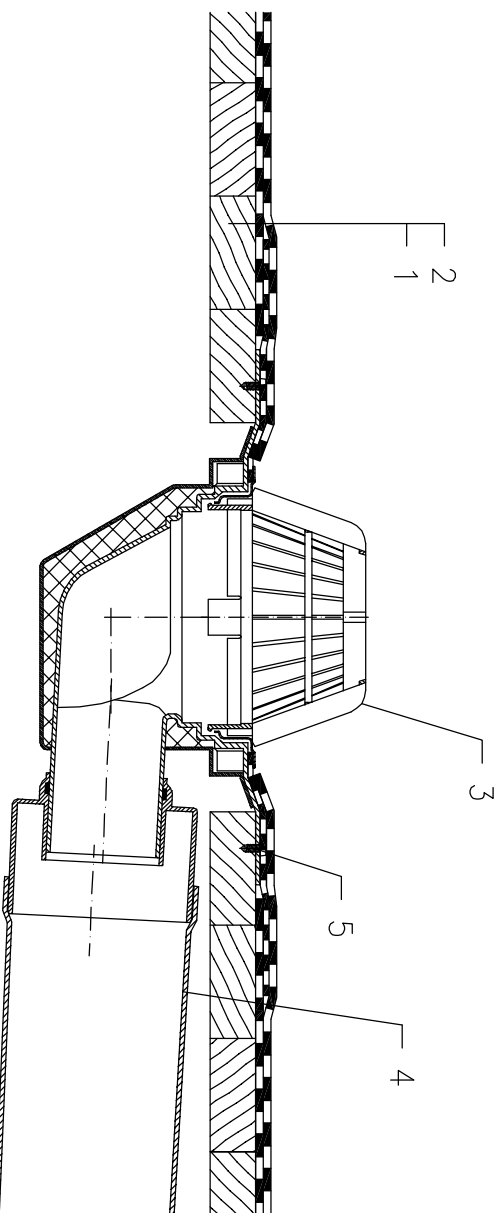

- 1 SUPPORT CONSTRUCTION – BOARDING
- 2 BITUMEN SHEET WATERPROOFING MECHANICALLY ANCHORE
- 3 FLAT-ROOF DRAIN HL64H WITH INSULATED DRAIN BODY,  
WITH FACTORY WELDED BITUMEN MEMBRANE  $\phi$ 500 mm,  
THICKNESS 4 mm, DOMED PLASTIC GRATE  $\phi$ 180 mm
- 4 DOWNPIPE
- 5 ANCHOR BOLT

NOTE:  
 FLAT-ROOF DRAIN HL64.1H HEATED (230V, 10-30 WATTS) CAN BE USED.  
 ASSEMBLY INLET: 260X360 MM