


NON-INSULATED – WALKABLE, PAVEMENT GLUED, PLASTIC FOIL WATERPROOFING

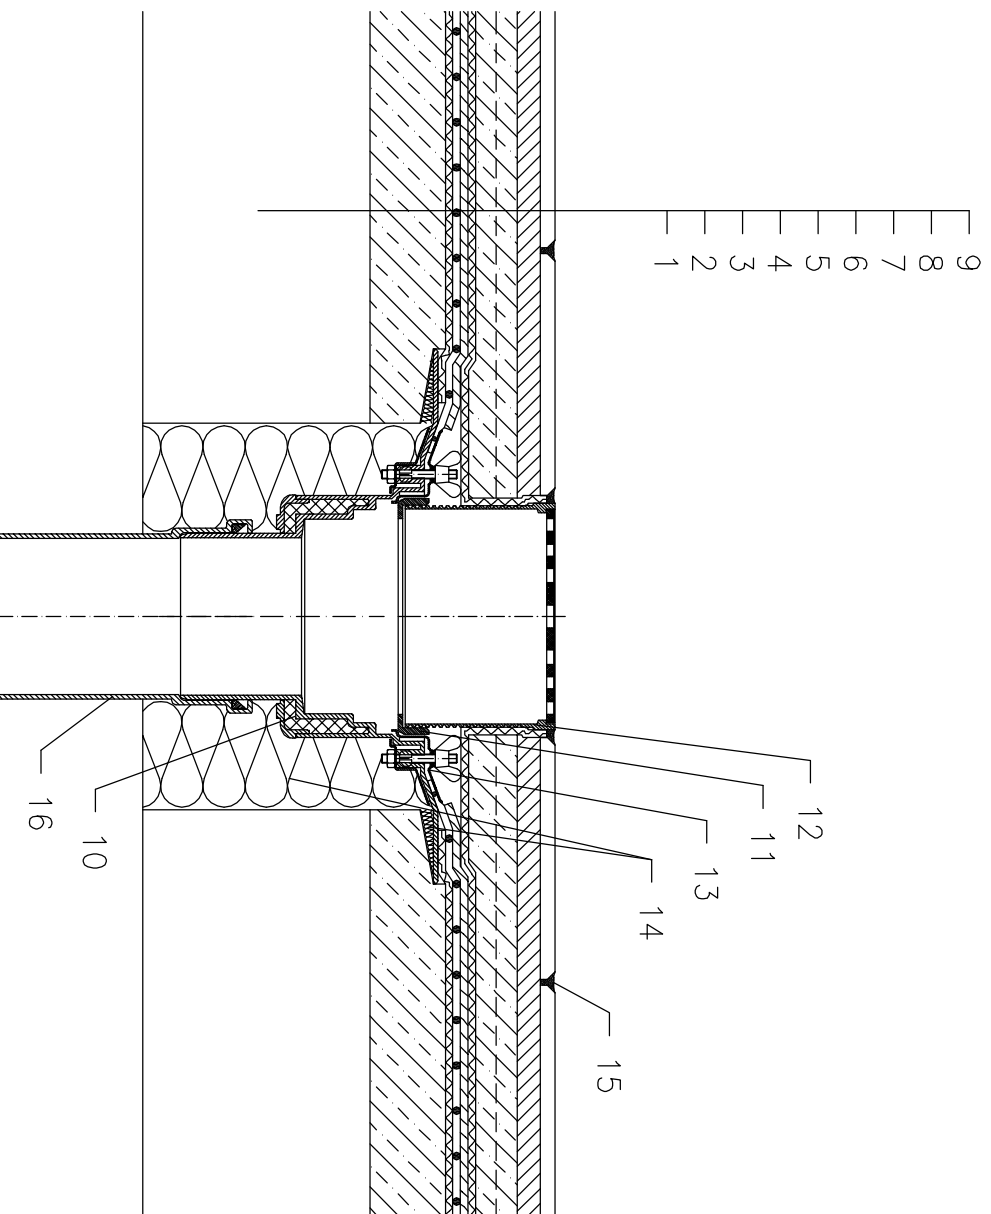

- 1 SUPPORT CONSTRUCTION
- 2 GRAVITY LAYER
- 3 DILATATION LAYER
- 4 PLASTIC FOIL WATERPROOFING LAID LOOSE
- 5 DRAINAGE LAYER
- 6 FILTER LAYER
- 7 CONCRETE SLAB
- 8 MORTAR BED OR GLUE
- 9 PAVEMENT
- 10 FLAT-ROOF DRAIN HL62B WITH INSULATED DRAIN BODY, FLANGE AND STAINLESS STEEL CLAMPING RING
- 11 ADAPTER 062B.3E (INCL. WITH HL62B)
- 12 GRATING HL66.9 WITH STAINLESS STEEL GRATE 150x150 mm, CHARGEABLE TO 300 kg (INCL. WITH HL62B)
- 13 SEALING PACKING (SEE DETAIL-ACCESSORIES)
- 14 ASSEMBLY FOAM
- 15 JOINT FILLER
- 16 DOWNPIPE

NOTE:
 FLAT-ROOF DRAIN HL62.1B HEATED (230V, 10-30 WATTS) CAN BE USED.
 ASSEMBLY INLET: \varnothing 220 MM, ALTERNATIVELY 240X360 MM