


WARM ROOF – GLUED SYSTEM, CLASSICAL STRUCTURE, WITH MOISTURE STOP,
 CONCRETE SUPPORTING STRUCTURE, PLASTIC FOIL WATERPROOFING

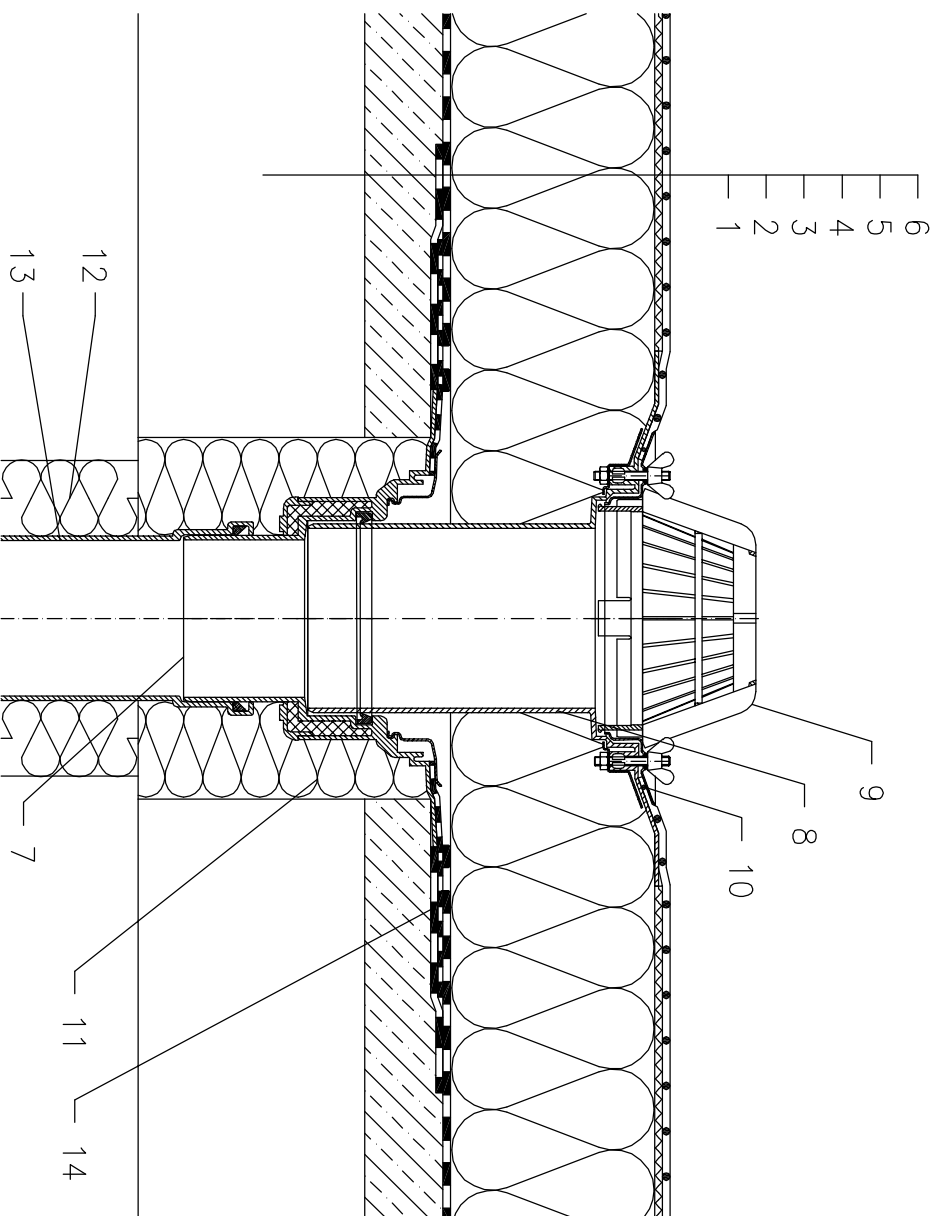

- 1 SUPPORT CONSTRUCTION
- 2 GRAVITY LAYER
- 3 DILATATION LAYER AND MOISTURE STOP FROM BITUMEN SHEE
- 4 THERMAL INSULATION
- 5 DILATATION LAYER
- 6 PLASTIC FOIL WATERPROOFING NON-SOLID GLUED
- 7 FLAT-ROOF DRAIN HL62H WITH INSULATED DRAIN BODY,
 WITH FACTORY WELDED BITUMEN MEMBRANE ϕ 500 mm,
 THICKNESS 4 mm
- 8 EXTENSION HL65 WITH FLANGE, STAINLESS STEEL
 CLAMPING RING AND LIP SEAL
- 9 DOMED PLASTIC GRATE ϕ 180 mm (INCL. WITH HL62H)
- 10 SEALING PACKING (SEE DETAIL-ACCESSORIES)
- 11 ASSEMBLY FOAM
- 12 DOWNPIPE THERMAL INSULATION
- 13 DOWNPIPE
- 14 BITUMEN MEMBRANE, ϕ 750 mm

NOTE:

FLAT-ROOF DRAIN HL62.1H HEATED (230V, 10-30 WATTS) CAN BE USED.

ASSEMBLY INLET: ϕ 220 MM, ALTERNATIVELY 240X360 MM