


WARM ROOF – GLUED SYSTEM, CLASSICAL STRUCTURE, WITHOUT MOISTURE STOP,
 TRAPEZOIDAL PLATE SUPPORTING STRUCTURE, BITUMEN SHEET WATERPROOFING

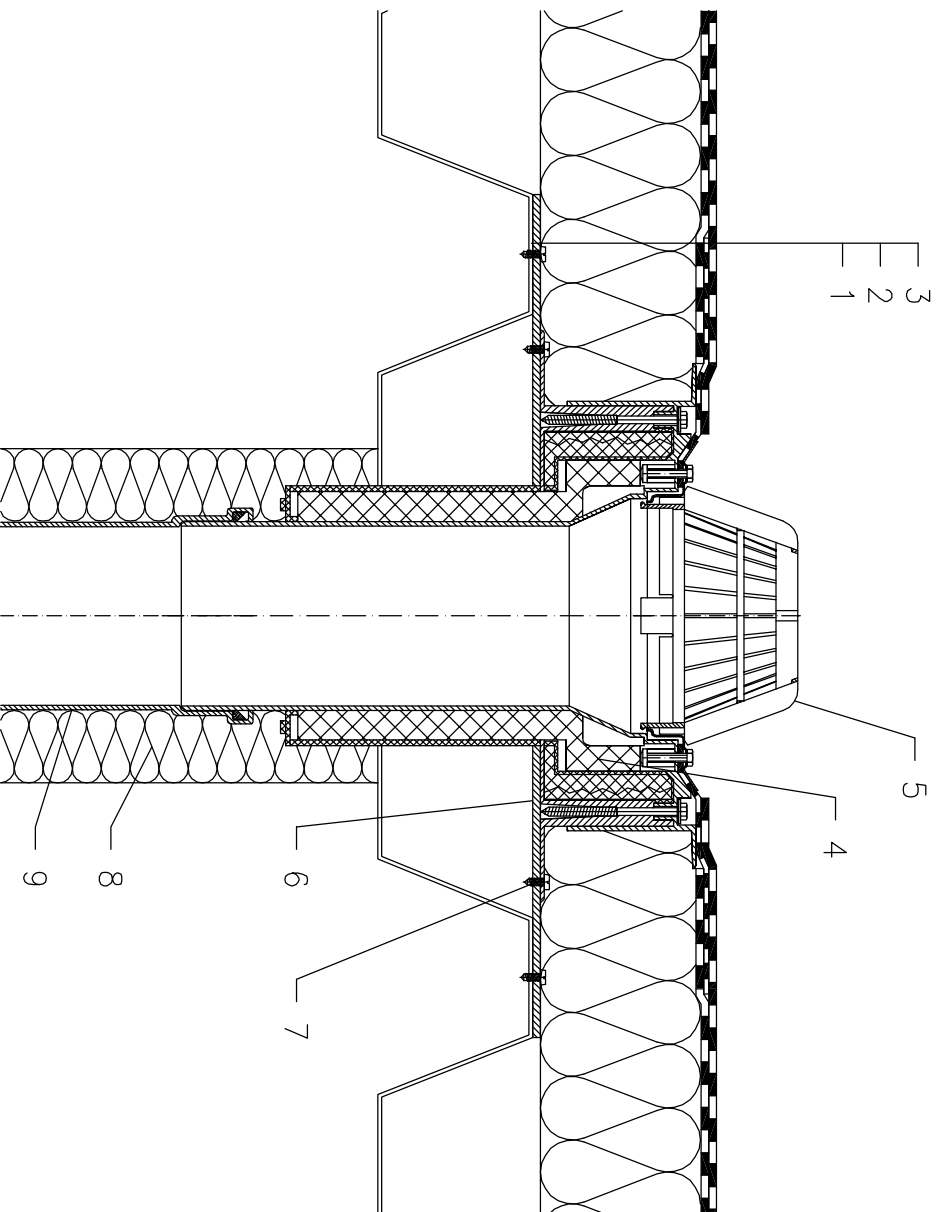

- 1 TRAPEZOIDAL PLATE
- 2 THERMAL INSULATION
- 3 BITUMEN SHEET WATERPROOFING GLUED
- 4 FLAT-ROOF DRAIN HL63H DRAINBOX, WITH INSULATED DRAIN BODY, TELESCOPED OUTER-HOUSING FOR PRECISE ADJUSTMENTS TO INSULATIONS 100-160 mm, FACTORY WELDED BITUMEN MEMBRANE ϕ 500 mm, THICKNESS 4 mm
- 5 DOMED PLASTIC GRATE ϕ 180 mm (INCL. WITH HL63H)
- 6 MOUNTING METAL PLATE
- 7 ANCHOR BOLT
- 8 DOWNPIPE THERMAL INSULATION
- 9 DOWNPIPE

NOTE:

FLAT-ROOF DRAIN HL63.1H HEATED (230V, 10-30 WATTS) CAN BE USED.

ASSEMBLY INLET: ϕ 200 MM