


WARM ROOF – GLUED SYSTEM, CLASSICAL STRUCTURE, WITHOUT MOISTURE STOP,
 TRAPEZOIDAL PLATE SUPPORTING STRUCTURE, PLASTIC FOIL WATERPROOFING

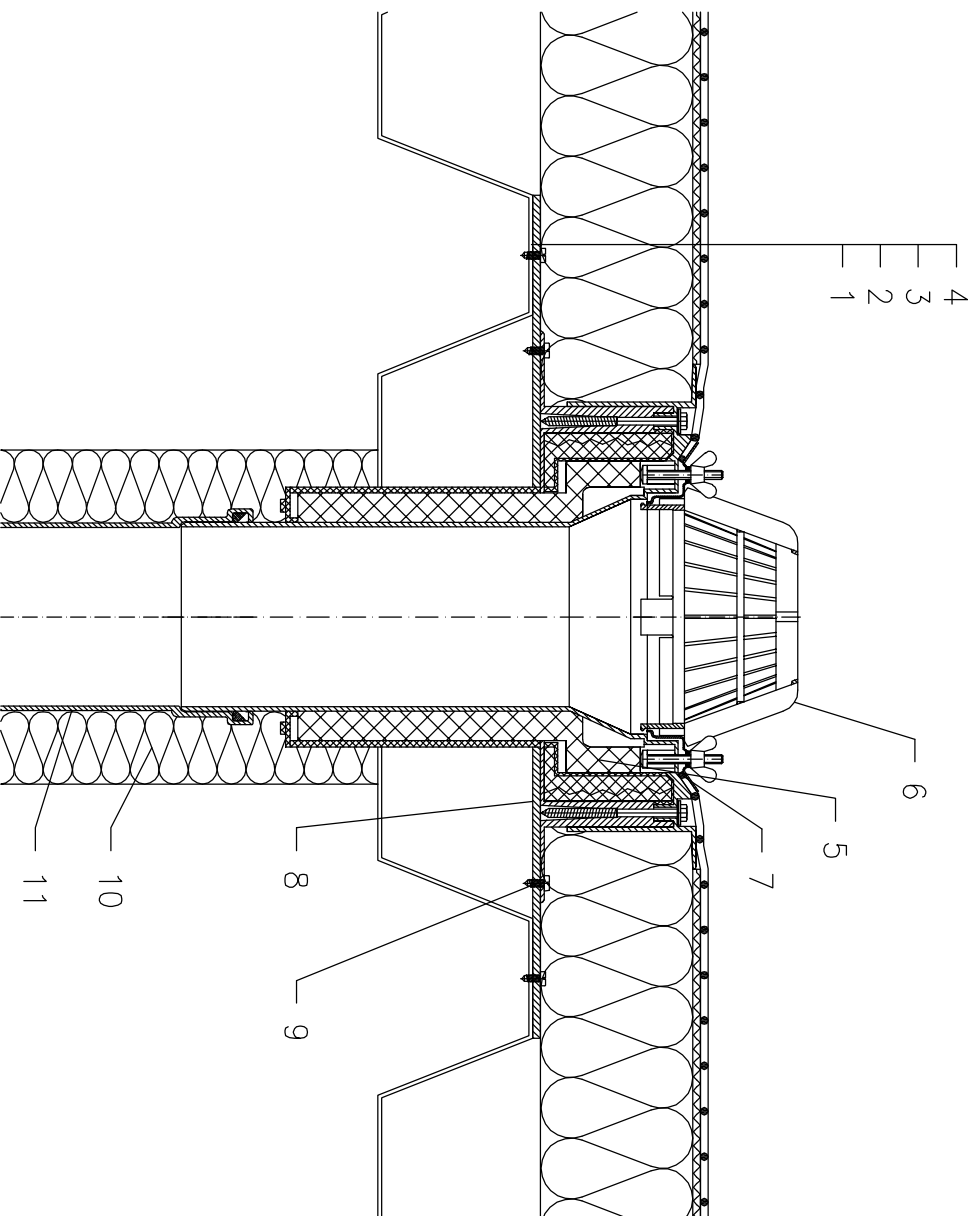

- 1 TRAPEZOIDAL PLATE
- 2 THERMAL INSULATION
- 3 DILATATION LAYER
- 4 PLASTIC FOIL WATERPROOFING NON-SOLID GLUED
 FLAT-ROOF DRAIN HL63 DRAINBOX, WITH INSULATED
 DRAIN BODY, TELESCOPED OUTER-HOUSING FOR PRECISE
 ADJUSTMENTS TO INSULATIONS 100-160 mm, FLANGE
 AND STAINLESS STEEL CLAMPING RING
- 5 DOME PLASTIC GRATE $\phi 180$ mm (INCL. WITH HL63)
- 6 SEALING PACKING (SEE DETAIL-ACCESSORIES)
- 7 MOUNTING METAL PLATE
- 8 ANCHOR BOLT
- 9 DOWNPIPE THERMAL INSULATION
- 10 DOWNPIPE
- 11

NOTE:

FLAT-ROOF DRAIN HL63.1 HEATED (230V, 10-30 WATTS) CAN BE USED.

ASSEMBLY INLET: $\phi 200$ MM