
WARM ROOF — WALKABLE, CLASSICAL STRUCTURE, PLASTIC FOIL WATERPROOFING

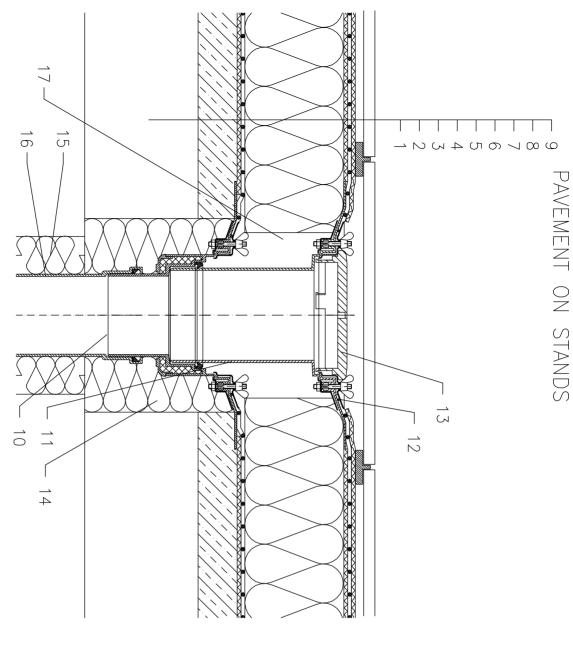

- SUPPORT CONSTRUCTION
- 2 GRAVITY LAYER
- DILATATION LAYER
- FROM PLASTIC FOIL
- THERMAL INSULATION
- DILATATION LAYER
- PLASTIC FOIL WATERPROOFING LAID LOOSE
- B DILATATION LAYER
- 9 PAVEMENT ON STANDS
- 10 FLAT-ROOF DRAIN HL62 WITH INSULATED DRAIN BODY, FLANGE AND STAINLESS STEEL CLAMPING RING
- 11 EXTENSION HL65 WITH FLANGE, STAINLESS STEEL CLAMPING RING AND LIP SEAL
- 12 SEALING PACKING (SEE DETAIL-ACCESSORIES)
- 13 FLAT GRATE HL170
- 14 ASSEMBLY FOAM
- 15 DOWNPIPE THERMAL INSULATION
- DOWNPIPE

16

7 FILL FREE SPACE WITH MINERAL WOOL

FLAT-ROOF DRAIN HL62.1 HEATED (230V, 10-30 WATTS) CAN BE USED. ASSEMBLY INLET: Ø220 MM, ALTERNATIVELY 240X360 MM