


DOUBLE LAYER ROOF – ANCHORED SYSTEM, TIMBER SUPPORTING STRUCTURE  
BITUMEN SHEET WATERPROOFING

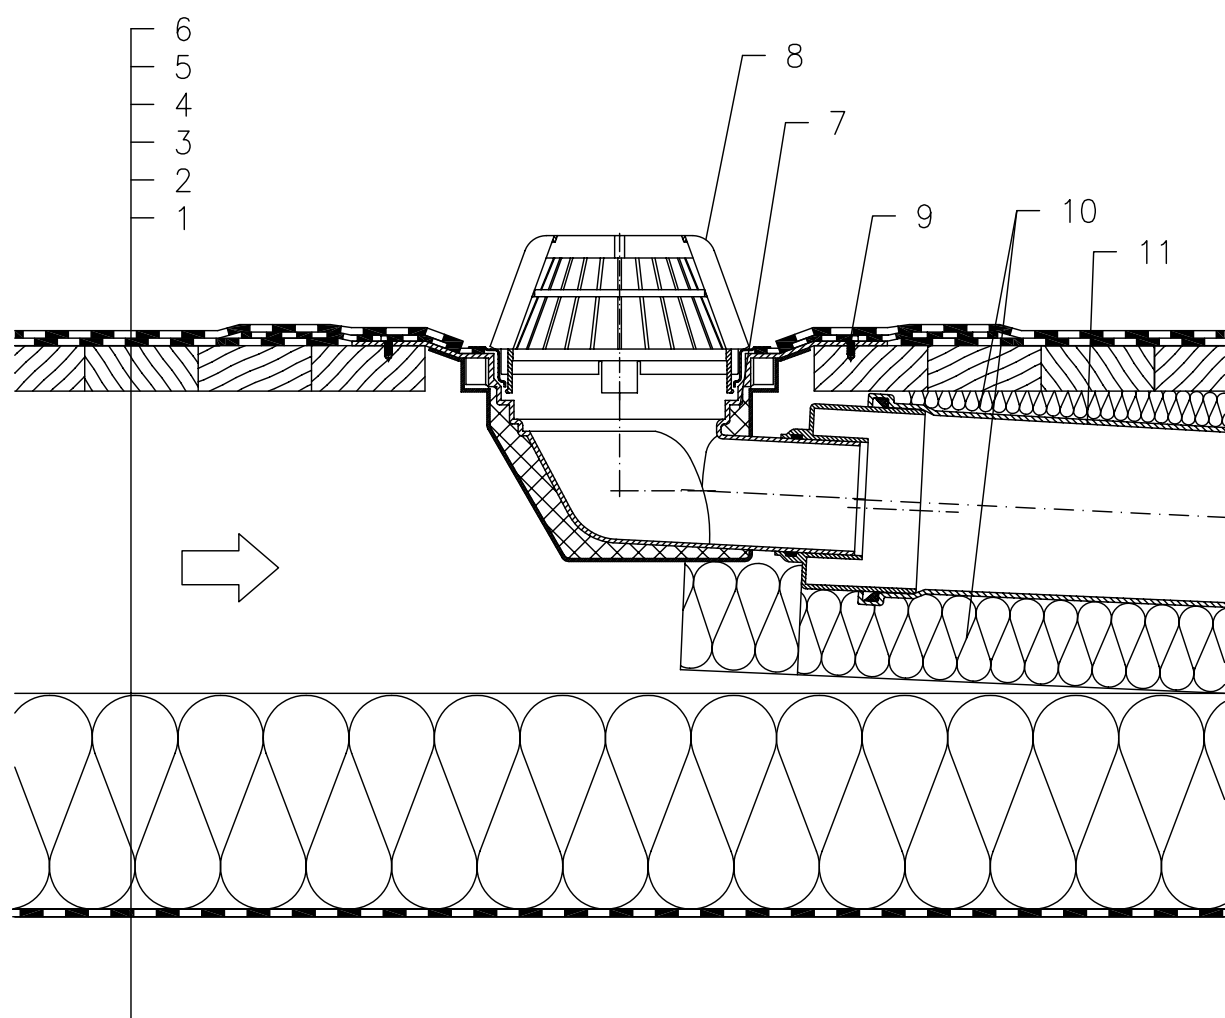

- 1 SUPPORT CONSTRUCTION
- 2 MOISTURE STOP AND TEMPORARY SAFETY WATERPROOFING FROM BITUMEN SHEET OR PLASTIC FOIL
- 3 THERMAL INSULATION
- 4 AIR LAYER
- 5 UPPER CLADDING SUPPORTING STRUCTURE – TIMBER
- 6 BITUMEN SHEET WATERPROOFING MECHANICALLY ANCHORED
- 7 FLAT-ROOF DRAIN HL64H WITH INSULATED DRAIN BODY, WITH FACTORY WELDED BITUMEN MEMBRANE  $\phi$ 500 mm, THICKNESS 4 mm
- 8 DOMED PLASTIC GRATE  $\phi$ 180 mm (INCL. WITH HL64H)
- 9 ANCHOR BOLT
- 10 DOWNPIPE THERMAL INSULATION
- 11 DOWNPIPE

NOTE:

FLAT-ROOF DRAIN HL64.1H HEATED (230V, 10–30 WATTS) CAN BE USED.

ASSEMBLY INLET: 260X360 MM