


WARM ROOF – ROOF RENOVATION, BITUMEN SHEET WATERPROOFING GLUED SYSTEM

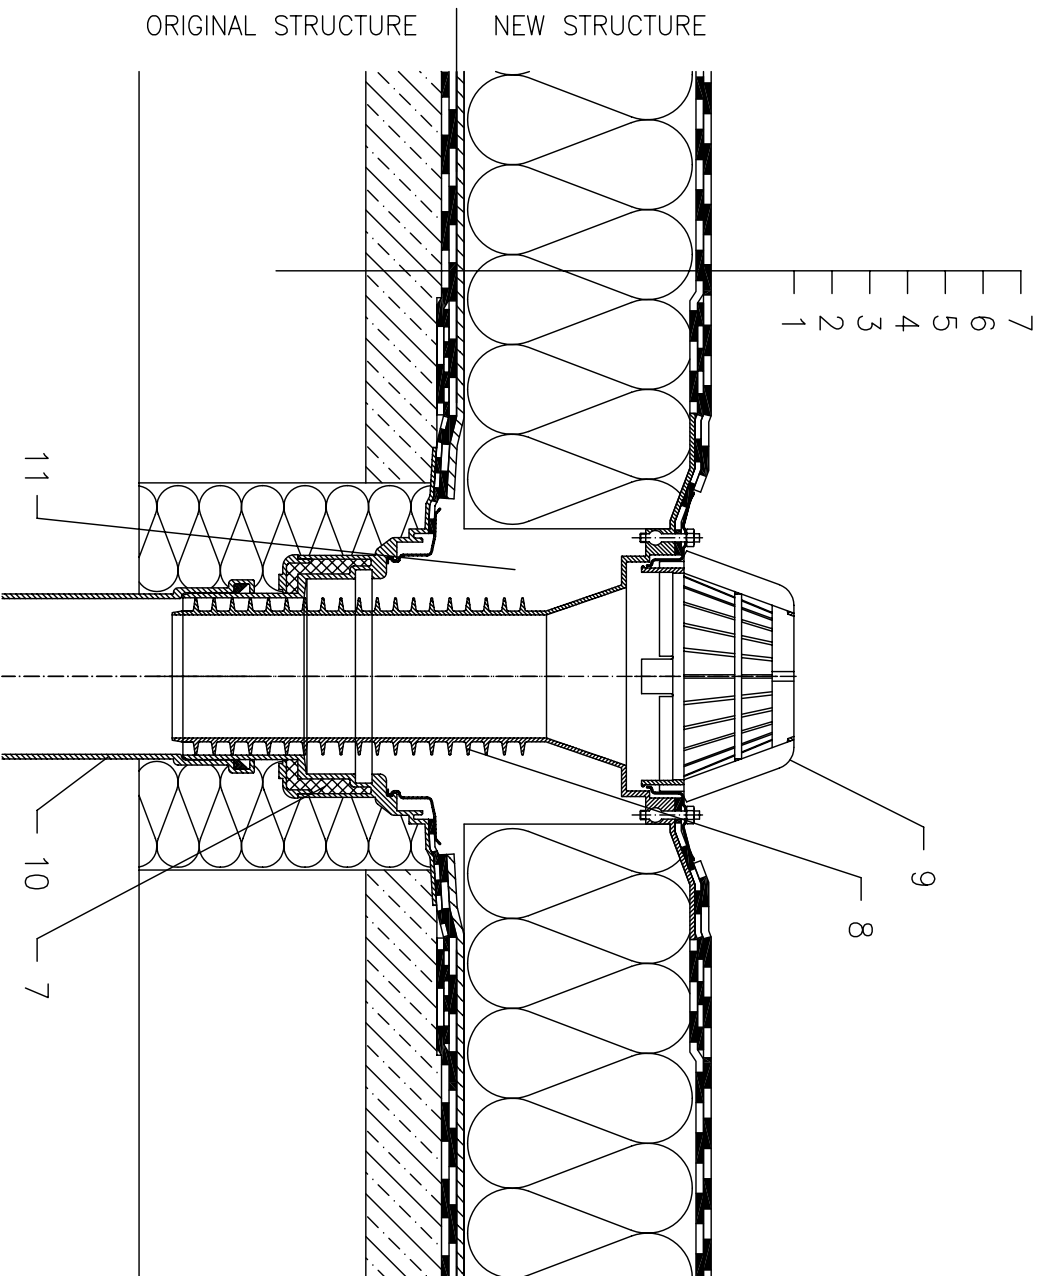

- 1 SUPPORT CONSTRUCTION
- 2 GRAVITY LAYER
- 3 ORIGINAL WATERPROOFING
- 4 DILATATION LAYER
- 5 THERMAL INSULATION
- 6 BITUMEN SHEET WATERPROOFING SOLID GLUED OR FUSED
- 7 ORIGINAL ROOF DRAIN
- 8 FLAT-ROOF RENOVATION DRAIN HL69H WITH FACTORY WELDED BITUMEN MEMBRANE ϕ 500 mm, THICKNESS 4 mm
- 9 DOMED PLASTIC GRATE ϕ 180 mm (INCL. WITH HL69H)
- 10 DOWNPIPE
- 11 FILL FREE SPACE WITH MINERAL WOOL